

MAVAM ESPRESSO

TECHNICAL DOCUMENT

How to Inspect or Change a Flow Restrictor (Jet) - Mach Two

Tools Needed: 3mm hex key,
12mm wrench, cleaning tool
(welding tip cleaners)

Warning: High Voltage area be sure to turn off and unplug the machine before servicing.


1. Remove the vented top cover of your machine. Refer to our "How to Access you Mach Two"
2. Turn the brew boiler shut-off lever to the horizontal position, OFF, the water will be cut off to that group.
3. Untighten the brass nut connecting the two-way to the brew boiler shut off, 12mm wrench. (A little bit of water may come out clean up with a rag or towel)
4. The two-way is still connected via multiple tubing and a wired connection, set out of



the way, be careful not to damage the tubing or wiring in the process.

5. You may now grab the jet, it sits inside the fitting in the shut-off valve.

6. Now inspect and clean with a cleaning tool, we recommend welding tip cleaners or a metal pick, if necessary or replace.

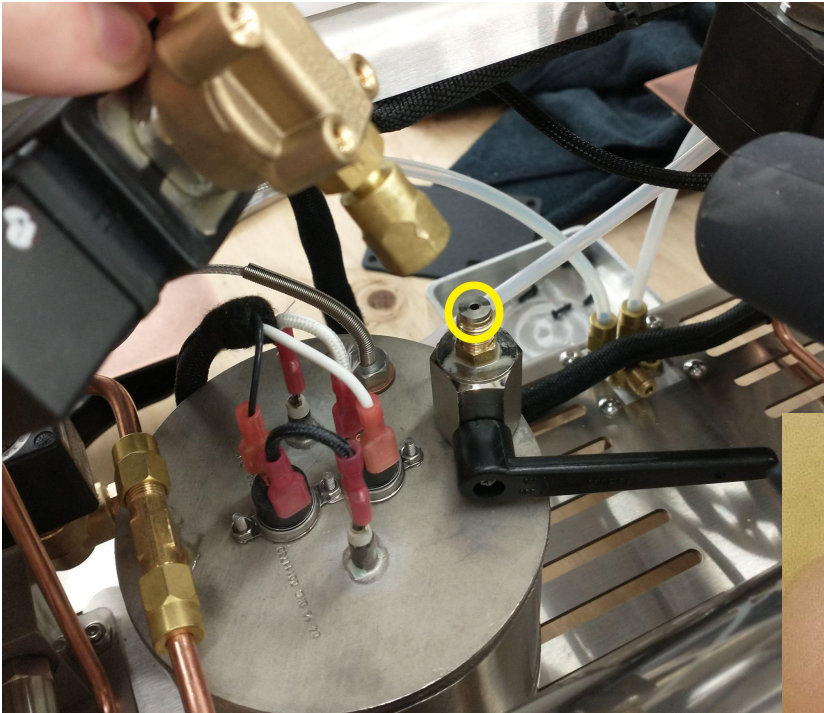

7. Place Jet back in its original position, connect the water line and turn the shut off "ON", vertical, and check for any leaks. Flow should improve.

